




IMAGO HANDS-FREE COLOUR TFT 4" VIDEO DOOR PHONE Ref. 1707/1

SPECIFICATIONS TECHNICAL SPECIFICATIONS

urmet
DOMUS

IMAGO HANDS-FREE COLOUR TFT 4" VIDEO DOOR PHONE Ref. 1707/1

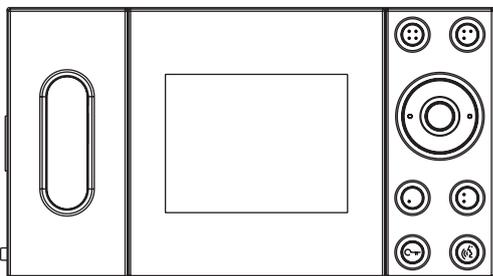



The Imago video door phone has been designed by architect Trabucco and is provided with a dedicated call loudspeaker and 3-level call tone volume adjustment (high-low-mute).

Imago is equipped with additional buttons for additional services and with an OSD display that allows adjustment of colour, brightness and contrast directly from the display, using a joystick on the video door phone. During the installation it is possible to choose the video door phone operating mode: Hands-free or Button pressed. In the first case, after receiving a call, press the Audio on button to start conversation, and press again the same button to stop it; in the second case, keep the Audio ON button pressed during all the conversation time.


SPECIFICATIONS

The main characteristics of the video door phone are:


- Flat 4" LCD colour module.
- Call tone volume adjustment and call tone exclusion function (Mute). In Mute mode (call excluded) is visible a mechanical red signal.



MAX.




MIN.



MUTE

 When volume is set to "MUTE" the video door phone will not ring but the video module will light up.

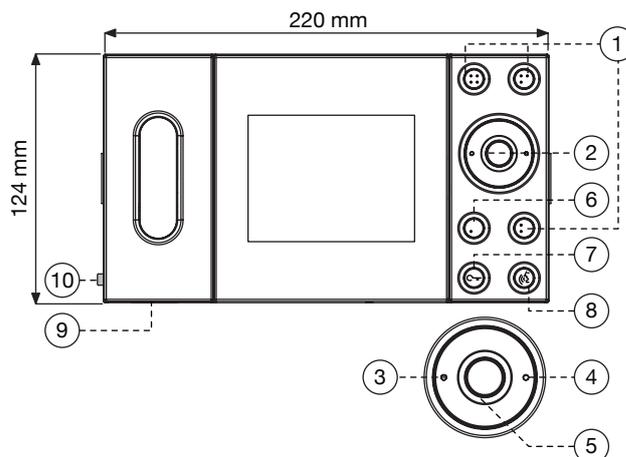

- AUXILIARY BUTTONS:** these can be used for specific functions according to the system.
- JOYSTICK:** this is used to adjust the video parameters.
- The left joystick button is used to decrease video parameters.
- The right joystick button is used to increase video parameters.
- SELECT:** This button is used to select the video parameter to be adjusted.
- AUTO-ON BUTTON**
- DOOR OPENER BUTTON:** This turns green when the video door phone is on. It turns red to indicate that the door is open and blinks red to indicate that the automatic door opening function is on.
- AUDIO BUTTON:** This turns green when the video door phone is on. The button will turn amber when the audio button is pressed.
- CALL VOLUME/MUTE CONTROL**
- MUTE INDICATOR:** A tab protrudes from the left-hand side of the video door phone when the volume is muted.

TECHNICAL SPECIFICATIONS

Power voltage:	16 ÷ 26Vcc
Working:	max 0,36A
PAL version:	Vertical frequency: 50Hz ± 5Hz
	Horizontal frequency: 15625 ± 100Hz
Video signal:	1Vpp ± 10%
Kinescope:	4" TFT (with OSD)
Video impedance:	>10KW
Resolution:	960 (H) x 234 (V) dot
Receiving capsule:	45Ω speaker
OSD Menu Control:	Brightness, Contrast and Colour
Max. call volume:	≥ 85dB
Transmitting capsule:	electret microphone
Button voltage:	24Veff. max
Button current:	0,5Aeff
Operating temperature range:	-5° ÷ +50°C
Max. humidity:	90% UR